



Works with any HDMI-ready device

- Blu-ray Player
- Cable Box
- Gaming Console
- Computer

Wireless Your Entertainment

Wireless 1080p HD Transmission Kit

WHD200

The WHD200 can wirelessly transmit any High-Definition content from your cable-box, Blu-ray player, or HDMI-ready computer placed anywhere in the house, to the HDTV. It's the best way to stream your 1080p content wirelessly.



Transmission Range up to 20 meters

Streams your video anywhere within the house*



Stream HD 1080p with 3D support

Transmits digital entertainment to HDTV with uncompressed 1080p HD & 3D quality



Plug-and-play; sets up in minutes

Works with any HDMI-ready device; no software installation required



Easy remote control operation


Supports IR Blaster & USB HID so you can operate remote control and keyboard in front of 2nd HDTV



*Transmission distance will depend on actual environment

How does it work?

- Hook up your entertainment equipment to the transmitter.
- Connect 1st HDTV to the loop-through port of transmitter.
- Connect 2nd HDTV to the wireless receiver

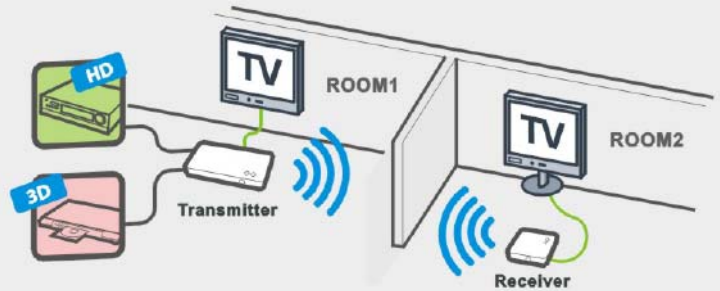


Why choose ZINWELL WHD200?

- Support up to 1080p@60Hz HD quality
- Less than 1ms latency; ideal for video gaming
- Long transmission distance- up to 20 meters (Line-of-sight)
- Passed HDCP 1.2; secure wireless transmission
- Passed HDMI 1.4; compatible with major HDMI-ready devices
- FCC&CE certified; meet requirement for environmental safety

Specifications

Transmitter

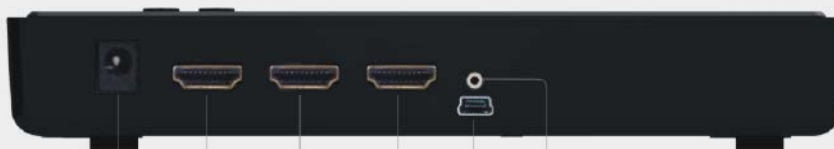

POWER DC IN | HDMI IN | HDMI IN | HDMI OUT | USB HID | IR OUT

Receiver



POWER Mini USB | USB HID | HDMI OUT

General Specifications			
Supported Video Resolutions	HDMI Input	1080p, 1080i, 720p, 576p, 480p	
Supported Audio Resolutions	Digital Audio	Up to 6 Mbps AC3 and DTS	
Transmission Distance	The maximum video transmission range is up to 20 meters (66 feet)* If you have more than one pair, each of transmitter and receiver should be at least 2 meters away from one another.		
Antenna	High Performance Internal Antenna		
Latency	< 1ms		
Operating Frequencies	4.9 ~ 5.9 GHz (Include non-DFS and DFS Frequency Bands)		
Power Supply	100 ~ 240V AC in, 5V DC out Power Adapter		
Operating Temperature	0°C~40°C		
Interface		Transmitter	Receiver
A/V	HDMI Input	Two	N/A
Interface	HDMI Output	One	One
IR Control	IR Sensor	Yes	Yes
	IR Blaster	Yes	No
USB HID Control		Mini USB	USB
Power Interface	Power Input	5V DC Jack	5V Mini USB
Switches	Power Switch	Yes	Yes
	Source Switch	Yes	Yes
LEDs	Power LED	1 x LED (Blue/ Red)	1 x LED (Blue/ Red)
	Source LED	2 x LED (Blue)	2 x LED (Blue)
Dimensions (W) x (L) x (H)		182 x 96.5 x 31.5 mm	95 x 95 x 32.2 mm

*Specs subject to change without notice



ZINWELL CORPORATION

<http://www.zinwell.com.tw>

